



Chromium plated valve

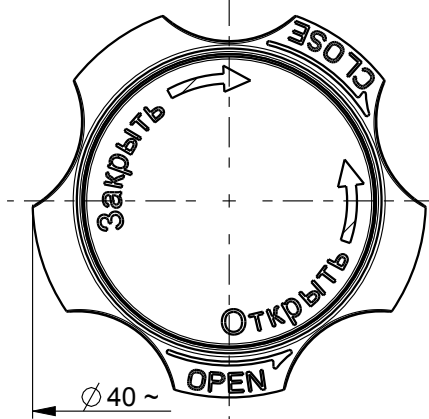

Markings:

- CAVAGNA GROUP symbol 
- EU
- ISO V
- 17E
- D6 (as per draw 4001102662)
- O₂
- Year and Month of construction (Ex.2017/06)
- (Production order)
- -40°
-   (see 2001101736)

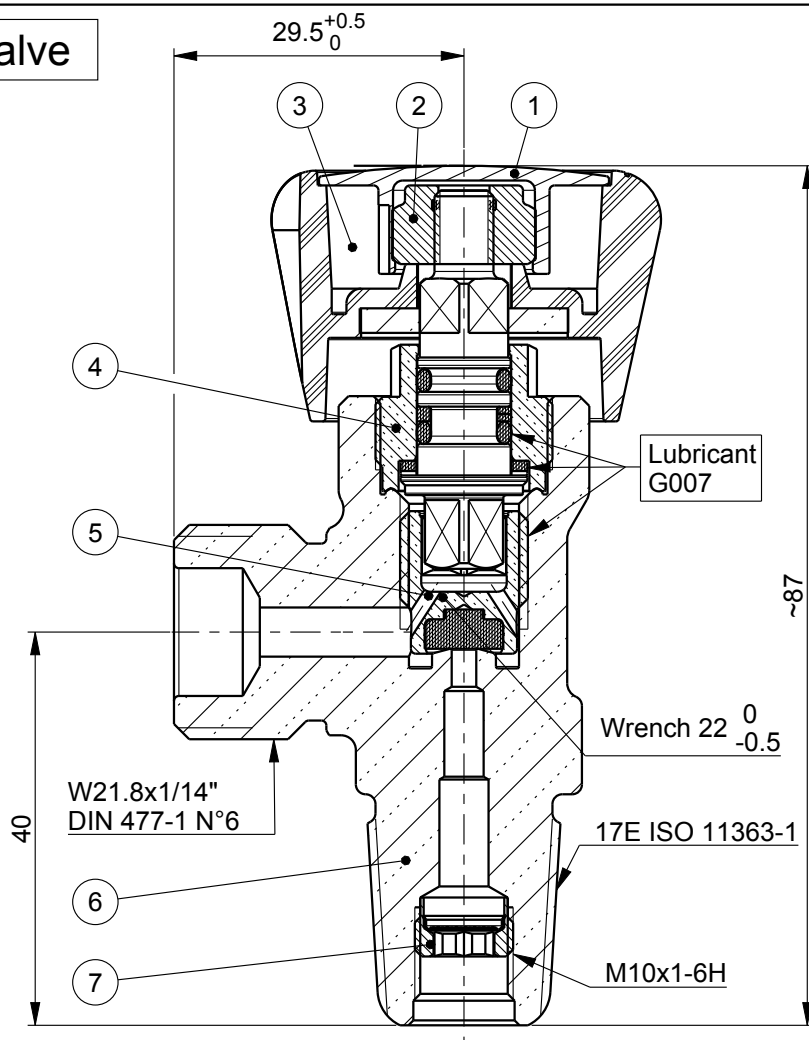

Cleaned for O₂ Service

Technical information:

Temperature range: -40° +65°C
Gland nut closure torque: 70 - 85 Nm
Orifice: Ø2.5 mm
W.P.: 200 bar

Materials:

Seat Pad: PA 66
Toroidal ring: EPDM
Antifriction ring: PA 66
Antiextrusion ring: PA 6

7	Filter	1	/	1079500009
6	Corpo cromato Mignon	1	Cu Zn40 Pb2 (CW617N) EN 12165	0171686387
5	Assembled piston	1	/	0379500043
4	Assembled spindle	1	/	1379500304
3	Assembled handwheel	1	/	0279500137
2	Special nut M6	1	X5CrNiMo1712 (1.4401 AISI316)	1071103446
1	Protection cap (Russia)	1	PA 6	1671705579
POS	DENOMINATION	Q.ty	MATERIAL	DRAW NR.

DESCRIPTION		K2009 Valve for O2 Med.					
		GEN. TOLL. ± -		GEN. FILL. R -		ANG. TOLL. ± -	DRAFT -
		RESPONS.		DRAWN		ISSUE	MATERIAL
		DATE		12-07-17		12-07-17	/
		SIGNATURE		Belotti		Ragnoli	
		ACTIVITY	NUMBER	22751	PROJECT	22751	DRAW NUMBER
			SIGN.	Treccani	REFERENCE	VOO1SOS026	VOB3SOS016
			INDEX	A0	WEIGHT Kg.	0.257	